produced by:





Material:

High molecular weight polyethylene
Dimensions: 2090 x 3060 mm
Usable Surface: 5,4 m²
Total thickness: 44,5 mm
weight circa. : 238 kg

Surface:

Top 5 mm profile Underside Anti-slip fluting


Assembly options: 10 pcs. M16

Colour: black multi-coloured Load bearing capacity (circa):

150t (depending on the substrate)

Transport capacity:

100units (540m²) Lorry 40units (216m²) 20'-Container 100 units (540m²) 40'-Container

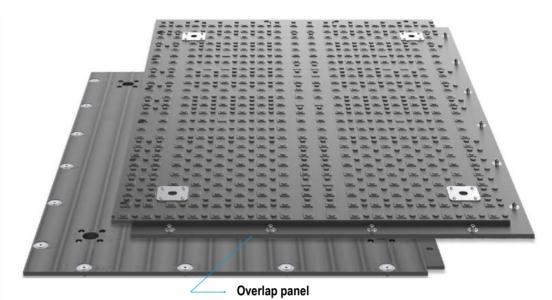

Fields of application:



Mobile installation surfaces for cranes



Wind power plant construction



Line construction



Heavy load transports



Temporary walkways



Concerts and events



Mobile logistics



Road construction and access roads



Mobile parking lots







Distribution Partner: Fomacon Group Mörsenbroicher Weg 191 | D- 40470 Düsseldorf Tel.: +49 211 975 323 90 Free call: +49 800 11 00 77 5 www.vario-mat.com E-Mail: info@vario-mat.com